

# SEAL KRETE

# DRIVEWAY PROTECTOR

## INVISIBLE WATER REPELLENT

PRODUCT DATA

**IMPORTANT:** Read all directions thoroughly. Always wear gloves and eye protection.

**BASIC USE:** SEAL-KRETE® Driveway Protector is a water-based concrete sealer designed to provide "invisible" protection to bare concrete surfaces such as driveways, sidewalks, porches and patios. With its unique formula, SEAL-KRETE Driveway Protector actually penetrates and bonds with the concrete to add strength and protect against rain, salt and freeze/thaw damage. It's easy to apply, dries fast and exhibits extreme beading. SEAL-KRETE Driveway Protector is non-yellowing, oil-resistant and long-lasting.

**SURFACE PREPARATION:** All surfaces must be clean, dry and oil-free. For oil stains, use a degreaser or SEAL-KRETE OSR Oil Stain Remover. Do not apply to painted, stained or colored concrete surfaces. Make sure all curing compounds and releasing agents have been removed. Repair all cracks and surface breaks. Cover windows, doors, etc., prior to application. Use caution when applying on windy days. Remove any overspray immediately with water. *Note: Do not apply to concrete less than 30 days old (fully cured). For new or smooth concrete, acid etching and neutralization are required for proper adhesion. Use a 1:3 solution of muriatic acid and water or SEAL-KRETE Clean & Etch, and follow manufacturer's directions. For complete acid-etching and neutralization procedures visit our web site at [www.seal-krete.com](http://www.seal-krete.com).*

**APPLICATION:** Do not apply if rain is expected within 24 hours. Temperatures should not fall below 55°F within 24 hours of application. Apply to bare, exterior concrete surfaces only. Do not apply to non-porous or smooth troweled concrete where penetration of the product will not be sufficient. Ready to use – do not dilute. Invert jug 4-5 times to mix. Apply using a garden sprayer or roller. **When using a sprayer,** lightly spray over the surface. To improve penetration and eliminate puddling, backroll entire surface. A fan-tip spray pattern is recommended. **For roller application,** use a short nap roller (1/4" to 3/8"). Apply generously, allowing to penetrate fully into concrete. Backroll if puddling occurs. Only apply 1 coat. SEAL-KRETE Driveway Protector dries quickly and will not accept a recoat of itself after it has begun to dry. For best results, continue application until job is completely finished.

**COVERAGE:** 200-300 sq. ft. per gallon. Coverage will vary based on surface porosity.

**DRY TIME:** Dry to touch in 15 minutes to 1 hour. Dry to foot traffic in 24 hours. Will accept vehicular traffic in 72 hours. (Measured at 77°F, 50% RH).

**LIMITATIONS:** Do not apply when the temperature of the surface to be coated is less than 55°F or when temperature is expected to drop below 55°F within 24 hours. Do not apply in wet or rainy conditions or if rain is forecast within 24 hours. Do not use below grade or on interior surfaces. Do not apply to any surface other than bare, porous concrete. Do not use on wood. Do not topcoat with any paint or stain. Over-application can result in white residue deposits on the surface. These deposits can be rinsed away with water after 24 hours.

**CLEAN-UP & STORAGE:** Clean all application tools immediately after use with soap and water. Keep from freezing - do not store at temperatures below 50°F.

**TECHNICAL SUPPORT:** For more information, technical assistance or to obtain a Material Safety Data Sheet, visit our website or call our technical service department M-F, 8am-5pm EST at 800-323-7357.

**CAUTION: KEEP OUT OF REACH OF CHILDREN.**

**FIRST AID:** **For Eye Contact:** Flush with water for 15 minutes. **For Skin Contact:** Prolonged contact may cause irritation. Wash affected area with soap and water. **If Swallowed:** Do not induce vomiting – seek immediate medical attention. **Inhalation:** If headache or nausea is experienced, remove the individual to fresh air. If symptoms persist, seek medical attention.



PRODUCT NUMBER	UNIT SIZE	UPC CODE	CARTON QTY	CARTON CODE	CARTON SIZE (L X W X H)	CARTON SIZE (CUBIC FEET)	CARTON WT. (LBS)	PALLET QTY. (CARTONS)
801001	1 GALLON	0 15944 80101 9	4	9 00 15944 80101 2	15 X 9.5 X 12.5	1.03	36	36
801005	5 GALLON	0 15944 80105 7	1	NA	12 X 12 X 15	1.25	45	36




**PENETRATES & BONDS WITH CONCRETE FOR SUPERIOR, LONG-LASTING MOISTURE PROTECTION**  
**MAXIMUM DURABILITY • PROTECTS AGAINST SPALLING, POCKMARKING & ROAD SALTS**  
**REDUCES "HOT TIRE" PICKUP • ONE-COAT APPLICATION • LOW VOCs**



*Left unprotected, concrete is subject to damage from road salts and moisture penetration*

## **Long-Lasting "Invisible" Concrete Driveway Protection**

*Maximum Durability, Protects Against Spalling, Pockmarking on Driveways, Sidewalks and Patios*

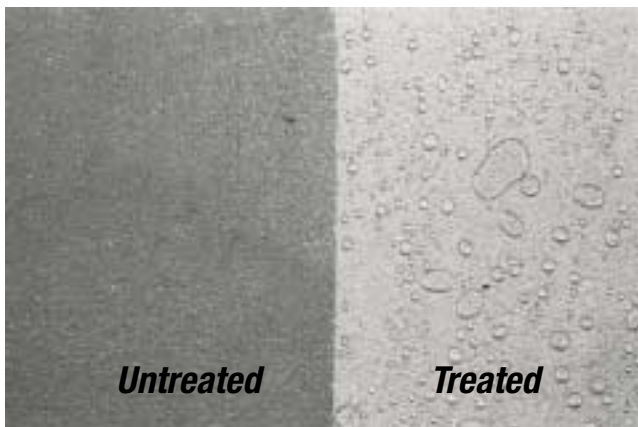

*Penetrates and bonds with concrete for superior long lasting moisture protection*

### **LIMITED WARRANTY**

Manufacturer/seller makes no warranty of any kind, except that this product is free from defect and is of merchantable quality. Buyer remedy for breach of warranty is limited to replacement of product or refund of purchase price.

### **LIQUID PROPERTIES**

Solids: 5%  
 Siliconate: Proprietary  
 Water Based  
 Odor: Very Low  
 Appearance: Clear  
 VOC: Less than 100 grams per liter.

### **COVERAGE GUIDELINES**

<b>Material</b>	<b>Coverage</b> Approx. sq. ft. /gal.
Bare Concrete	200-300
Actual coverage will vary depending on porosity of surface.	



Convenience Products • 306 Gandy Rd., Auburndale, FL 33823  
 Questions or comments? E-mail: [tech@seal-krete.com](mailto:tech@seal-krete.com) or call 1-800-323-7357 • Visit our web site at [www.seal-krete.com](http://www.seal-krete.com)